<address>-TAG IN HTML

- The <address> tag is used to define the contact information for owner of a document or an article.
- Usually the <address> element is shown in italic.
- The address tag supports **Global and Event attributes.**
- Browsers gives the line break before and after the <address> element.
- <address> tag belongs to **Flow Content** and **Palpable Content Category.**

Syntax for <address> tag:

<address>Content is here....</address>

Differences between HTML 4.01 and HTML5 for <address>tag:

HTML 4.0.1

- HTML 4 doesn't support article tag. hence <address> tag defines the author or owner contact information of the documents.

HTML5

- HTML 5 supports an article tag.

Sample coding for <address>tag in HTML:

```html
<!DOCTYPE html>
<html>
    <body>
        <address>
            Written by <a href="http://www.wikitechy.com/">Wikitechy</a>.<br>
            Visit us at:<br>
            https://www.facebook.com/wikitechy/?fref=ts
        </address>
    </body>
</html>
```
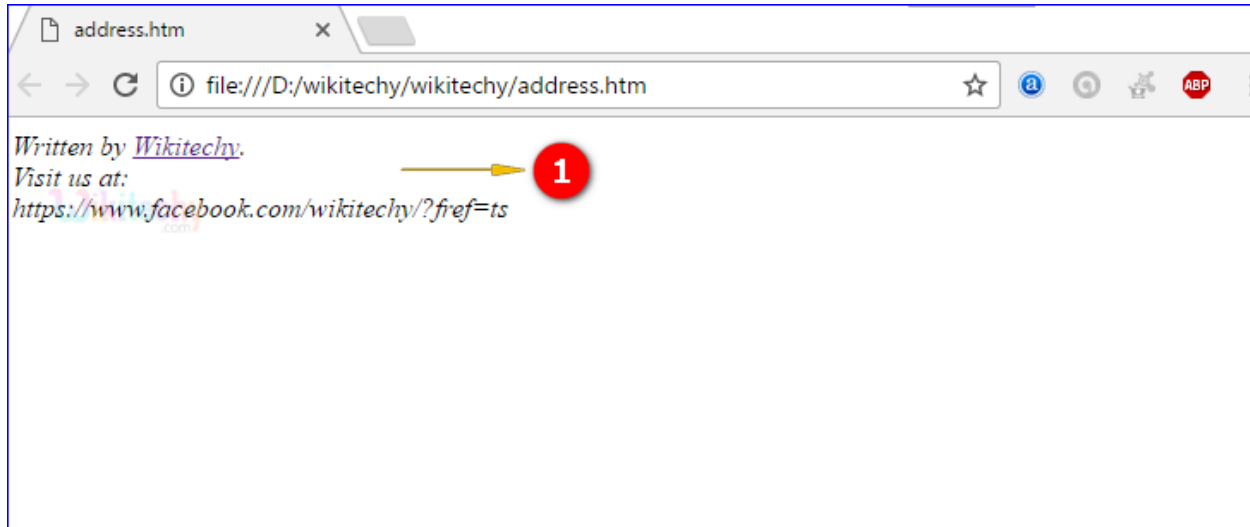
Code Explanation for <address>tag in HTML:

```html
<!DOCTYPE html>
<html>
    <body>

        <address>              1
          Written by <a href="http://www.wikitechy.com/">
          Wikitechy</a>.<br>
          Visit us at:<br>
          https://www.facebook.com/wikitechy/?fref=ts
        </address>

    </body>
</html>
```

1. <address> element is given for the contact information of the document.

Output for <address>tag in HTML:

1. Contact information of the document is displayed in the output.

Browser Support for <address> tag in HTML:

Browser	Language Attribute
Chrome	Yes
Internet explorer / Edge	Yes
Firefox	Yes
Safari	Yes
Opera	Yes

Tips and Notes

- <address> tag includes with the other information in footer element.
- <address> tag does not used for the Postal information unless it is the part of the contact information.