<b> - BOLD TAG IN HTML

- Bold tag is used to **boldface** the text inside the tag.

- <b> tag belongs to **Flow content, Phrasing content and Palpable content Category.**

- The bold tag supports **Global Attributes** and **Event Attributes**.

Syntax for <b> tag in HTML:

```
<b>Content</b>
```

Sample coding for <b> tag in HTML:

```
<!DOCTYPE html>
  <html>
    <body>
      <p>
        <b>Learn</b> to Code in Wikitechy <br>
        <b>Teach</b> people how different technologies are organized
        <br>
        <b>Covers</b> a variety of topics<br>
        <b>Ranging</b> from advanced beginners to skill levels.
      </p>
    </body>
  </html>
```

Code Explanation for <b>tag in HTML:
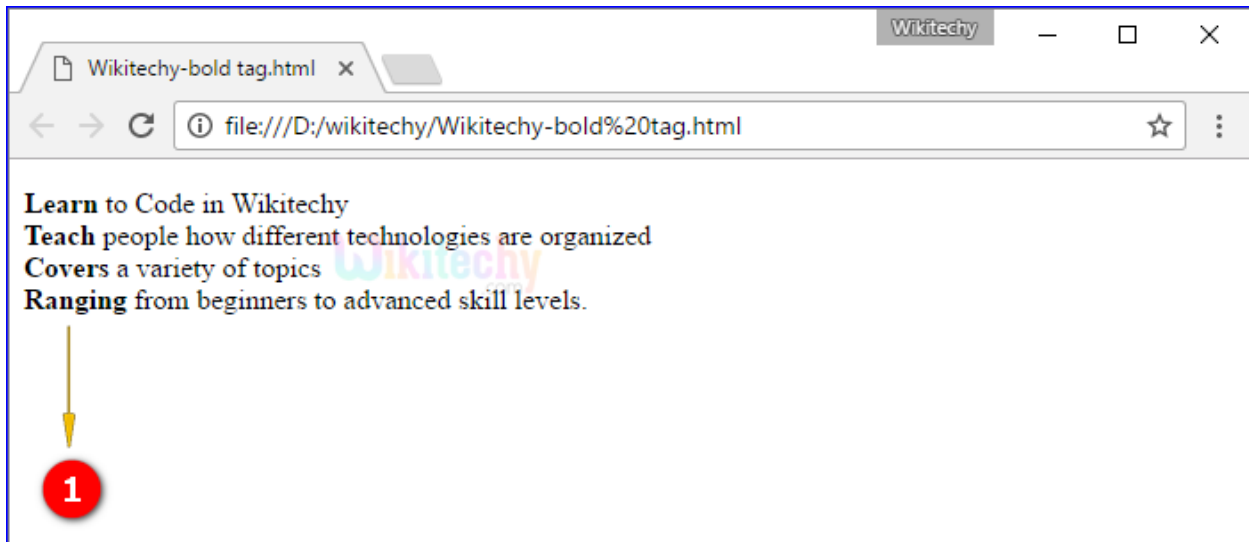
```
<!DOCTYPE html>
<html>
  <body>
    <p>
      <b>Learn</b> to Code in Wikitechy <br>
      <b>Teach</b> people how different technologies are organized
      <br>
      <b>Covers</b> a variety of topics<br>
      <b>Ranging</b> from beginners to advanced skill levels.
    </p>
  </body>
</html>
```

1. **<p>** tag is used to display content within the paragraph tag in the html document.

2. The text inside the <b> tag will be displayed in boldfaced text.

Output of <b>tag in HTML:

1. The words "**Learn, Teach, Covers** & **Ranging**" was in boldfaced text which has been coded inside the **<b> tag.**

Browser Support for <b> tag in HTML:

Browser	Language attribute
Chrome	Yes
Internet explorer / Edge	Yes
Firefox	Yes
Safari	Yes
Opera	Yes

Tips and Notes

- <strong> and <b> tag has different meaning, but the browser will display <strong> as <b>.
- <strong> means that the text is "important".
- We should not use this <b> tag for title element.