

<button> Tag in HTML

- <button> element specifies the clickable function.
- Inside the button tag we can put content like images or text.
- It supports **Global and event attributes**.
- <button> tag belongs to **Flow content, Phrasing content, interactive content, listed, labelable,submittable form associate Content category**.

Syntax for <button> tag:

```
<button >Content here...</button>
```

Sample coding for <button> tag:

```
<!DOCTYPE html>
<html>
<body>
  <button type="button"
  onclick="alert('welcome to wikitechy')">
  Click Me!</button>
</body>
</html>
```




Code Explanation for <button> tag:

```
<!DOCTYPE html>
<html>
  <body>
    <button type="button"
      onclick="alert('welcome to wikitechy')">
      Click Me!</button>
  </body>
</html>
```

1. <button>tag used to show a button with clickable event.

Output for <button> tag:

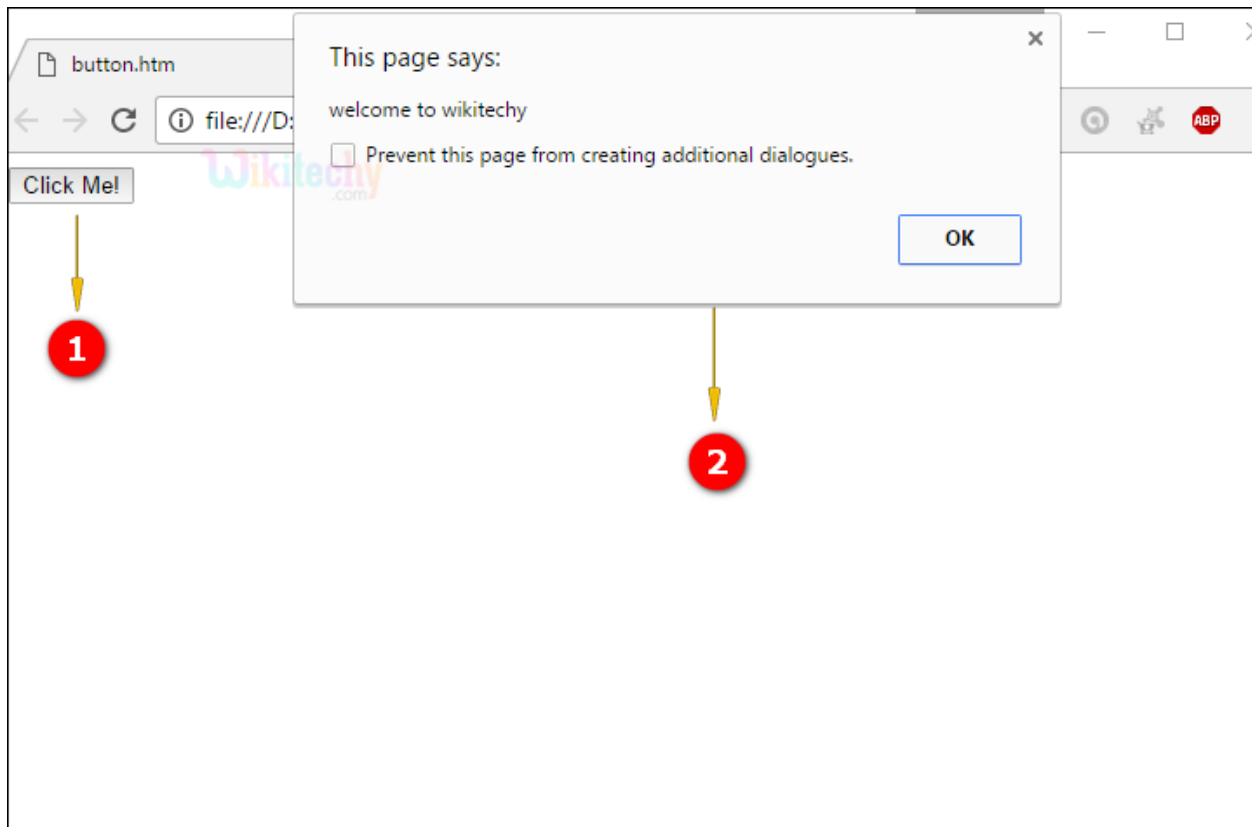

1. Button is displayed with the name "Click Me!" text.
2. When user clicks the button an alert message is displayed as "welcome to wikitechy".

Attributes of <button> tag:

Attributes	Value	HTML 4	HTML 5	Description
autofocus	autofocus	No	Yes	a button should automatically get focus when the page loads
form	form_id	No	Yes	one or more forms the button belongs to
formaction	URL	No	Yes	Denotes where to send the form-data when a form is submitted. Only for type="submit"
formenctype	application/x-www-form-urlencoded multipart/form-data text/plain	No	Yes	Denotes how form-data should be encoded before sending it to a server. Only for type="submit"
formmethod	get post	No	Yes	Specifies how to send the form-data (which HTTP method to use). Only for type="submit"
formnovalidate	formnovalidate	No	Yes	Specifies that the form-data should not be validated on submission. Only for type="submit"
formtarget	_blank _self _parent	No	Yes	Specifies where to display the response after

	_top frameName			submitting the form. Only for type="submit"
disabled	disabled	Yes	No	a button should be disabled
name	name	Yes	No	a name for the button
type	button reset submit	Yes	No	the type of button
value	text	Yes	No	Specifies an initial value for the button

Browser Support for <button> tag:

Browser	Language attribute
Chrome	Yes
Internet explorer / Edge	Yes
Firefox	Yes
Safari	Yes
Opera	Yes

