

<html> - html TAG IN HTML WITH EXAMPLE

- The <HTML> tag is used to **start the HTML documents** and to make the browsers to understand it is a HTML documents.
- The container for all other HTML elements is <html> tag.
- <html> tag is denoted as the root of the HTML page.
- <html> tag supports **Global attributes**.

Syntax for <html> tag:

```
<html> Content </html>
```

Differences between HTML 4.01 and HTML5:

HTML 4.01 <html> tag:

- "Manifest" attribute is not supported.

HTML 5 <html> tag:

- "Manifest" attribute is added.



Sample coding for <html> tag:


```
<!DOCTYPE html>
<html>
  <head>
    <title>Wikitechy</title>
  </head>
  <body>
    <p>Welcome to wikitechy.com</p>
  </body>
</html>
```

Code Explanation for <html> tag:

```
<!DOCTYPE html>
<html> → 1
  <head>
    <title>Wikitechy</title>
  </head>
  <body>
    Welcome to wikitechy.com
  </body>
</html>
```

1. **html tag** – defines the root of the HTML document.

Output for <html> tag:

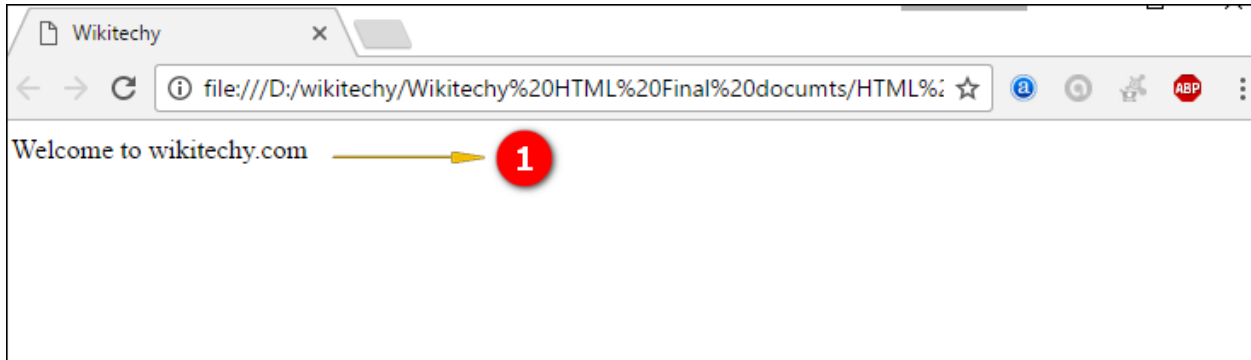

1. We can see the output content of html tag in the web browser.

Browser Support for <html> tag:

Browser	Language attribute
Chrome	Yes
Internet explorer / Edge	Yes
Firefox	Yes
Safari	Yes
Opera	Yes