

<sub> TAG IN HTML

- The **<sub>** tag is used to show the text as subscript text.
- This tag is mostly used for chemical Formula's.
- Subscript texts are placed in bottom of the Normal Line.
- Sub tag is start with **_{** and it end with **}**.
- The sub tag will also support both **Global Attribute** and **Event attribute**.

Syntax for <sub> tag:

```
<sub> content </sub>
```

Differences Between HTML 4.01 and HTML5 for <sub> tag in HTML:

- HTML 4 and HTML 5 are supports <sub> tag.

Sample coding for <sub> tag:

```
<!DOCTYPE html>
<html>
  <head>
    <title>Wikitechy sub tag</title>
  </head>
  <body>
    <h2> HTML sub tag with example</h2>
    <p>HTML tutorial by Wikitechy<sub>.com</sub> </p>
  </body>
</html>
```




Code Explanation for <sub> tag:

```
<!DOCTYPE html>
<html>
  <head>
    <title>Wikitechy sub tag </title>
  <body>
    <h2> HTML sub tag with example</h2>
    <p>HTML tutorial by Wikitechy<sub>.com</sub> </p>
  </body>
</html>
```



1. **<sub>** tag is used to defined the text as a subscript text.

Sample Output for <sub> tag:

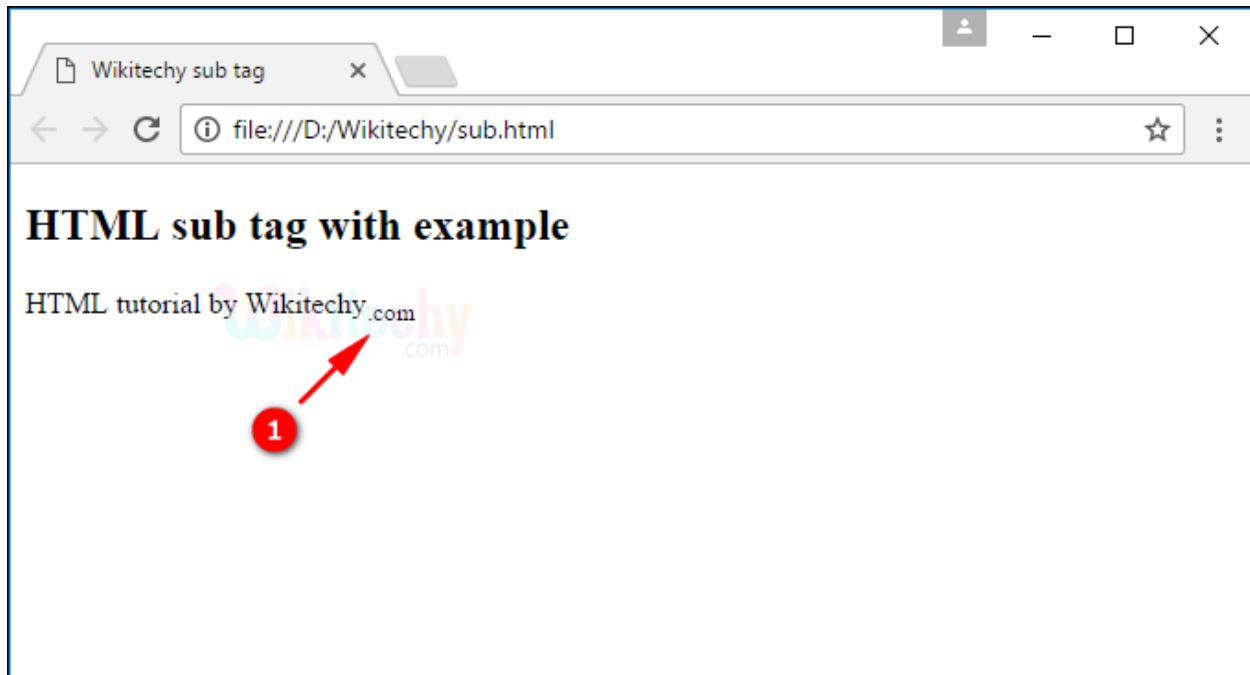

1. The output shows the text **".com"** is displayed in subscript.

Browser Support for <sub> tag:

Browser	Language attribute
Chrome	Yes
Internet explorer / Edge	Yes
Firefox	Yes
Safari	Yes
Opera	Yes

